



⇒ MAINTENANCE



⇒ TRAINING


⇒ AGREEMENT

⇒ BATTERIES CERTIFICATION




Dimensions & weight

Masse	45 kg
Largeur	483 mm
Hauteur	177 mm
Profondeur	560mm

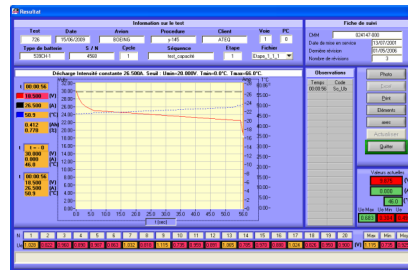

## Options



- Individual element voltage measurement
- Deep discharge module
- Temperature battery checking



## EEST 650 42-60

### Main Features

- ◆ 1 channel of charge/discharge 42V/60A
- ◆ Immediate or Delayed test strat
- ◆ The Bench can store 7 sequence Of 20 stages
- ◆ Charge at I or U constant
- ◆ Discharge at I constant
- ◆ Stand by phase
- ◆ AT constant Intensity => Stop on voltage limit Min, Max and time charge and discharge
- ◆ Charge at constant voltage=> Charging stop at I min or time or  $\Delta I$
- ◆ Stop on limits - Delta V on charge at I cst
- ◆ Alarms for check level of electrolyte and end of test
- ◆ Message display or alarm when a stage is stopped
- ◆ Stage and test display
- ◆ Test time display
- ◆ U battery and I display and temperature display in option
- ◆ U Max, Min display and elements average in option
- ◆ Supplied or absorbed capacity display
- ◆ Internal temperature of power module display